


# INSTALLATION INSTRUCTIONS

## SIDEBAR PART # 201001/201001-2

### 1999-2004 GRAND CHEROKEE 2/4WD

#### PARTS LIST:

| Qty | Description                               | Qty | Description         |
|-----|-------------------------------------------|-----|---------------------|
| 1   | Driver Side/left side bar                 | 8   | ½" x 1 ¼" Hex Bolts |
| 1   | Passenger Side/right side bar             | 4   | ½" x 2" Hex Bolts   |
| 2   | Driver & Passenger Front Mounting Bracket | 12  | ½" Flat Washers     |
| 2   | Driver & Passenger Rear Mounting Bracket  | 12  | ½" Lock Washers     |
| 4   | Thread Nut Plates                         |     |                     |

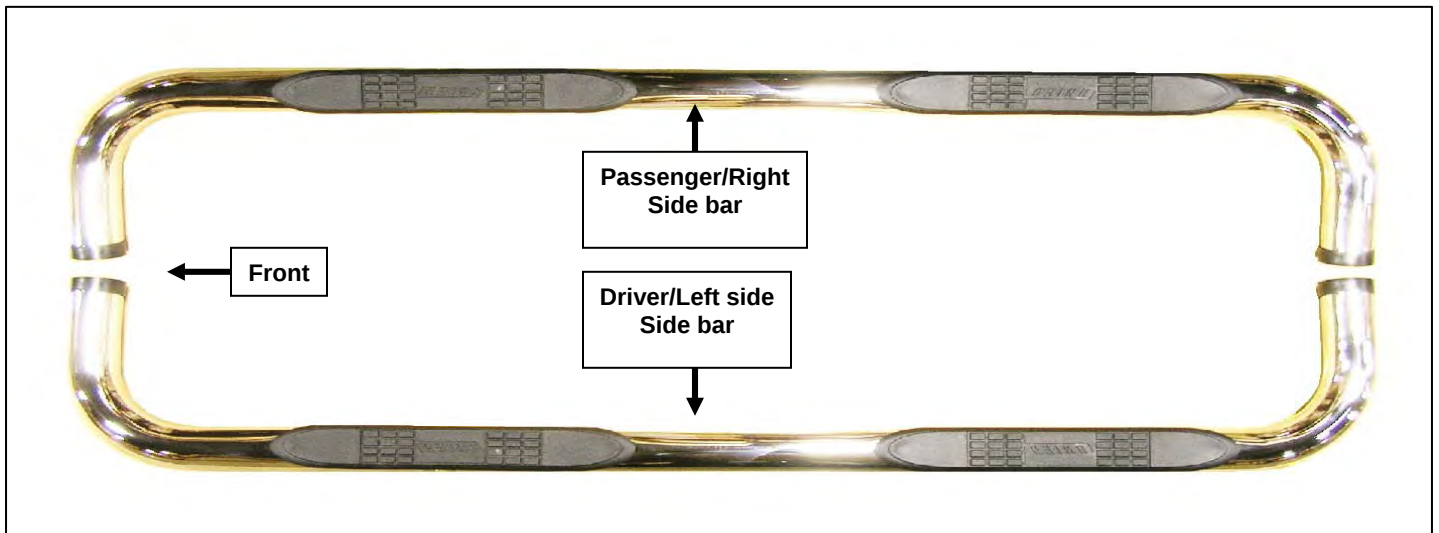


Passenger/Driver Front Mounting Brackets



Passenger/Driver Rear Mounting Brackets



1/2" Nut Plate x 4

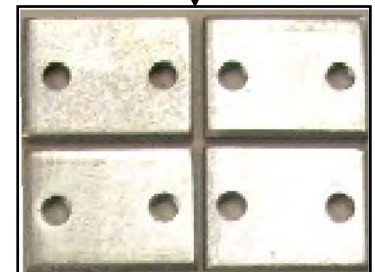

## PROCEDURE:

1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.
2. Starting with the Driver/left side Proceed with your install (refer to Fig 1)
3. From parts list above select Driver/left side sidebar,(Note: step pad closest to the end of tube go to rear of vehicle, attach both Front and Rear mounting Brackets to Side Bar using (1) 1/2" x 2" Hex Bolt,(1) 1/2" Flat washer & (1) 1/2" Lock washer for each mount bracket. Snug but do not tighten hardware at this time.
4. Slide the Nut plate into vehicles front suspension mount & secure the front mounting bracket to the nut plate with (2) 1/2" x 1 1/4" Hex bolts, (2) 1/2" flat washers, (2) 1/2" lock washers. Snug but do not tighten hardware at this time.
5. Secure the rear mounting bracket to the vehicles rear suspension mount in the same manner. Snug but do not tighten hardware at this time.
6. Align Sidebar properly, and then tighten all hardware.
7. Repeat steps 2 - 6 for the passenger Sidebar.
8. Do periodic inspections to the installation to make sure that all hardware is secure and tight.

**To protect your investment**, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

**For stainless steel:** Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Sidebar.

**For gloss black finishes:** Mild soap may be used to clean the Sidebar.

### DRIVER SIDE SIDEBAR

