INSTALLATIONS INSTRUCTIONS 4089 (B-C-PS)



Parts list:					Required Tools (no included)		
ITEM	QTY.	CODE	DESCRIPTION	TORQUE MAX.	DESCRIPTION 9/16" Socket / wrench		QTY.
1	1	4089D	Side Bar driver side	-			1
2	1	4089P	Side Bar passenger side	-	3/4" Socket / wren	ch	1
	1	4089TK	Brackets kit includes:	-	1/2" Socket / wren	ch	1
3	2	4097F	Main bracket front	-	17mm Socket		1
4	2	4097R	Main bracket rear	-	Ratchet		1
5	2	40971	Support bracket passenger side	-	Extension		1
6	2	40972	Support bracket driver side	-			
7	4	370200AA	3/8 x 1 1/4" T Bolt		ILLUSTRATION 1		
8	2	40974	D. Int 1/2" D. Ext. 1 1/2" Spacer	-			
	1	KTE-G4089	Hardware kit includes:	-			
9	4		1/4 x 3/4" Hex head bolt	9 Lb.Ft			1111
10	4		1/4" Flat washers	-	\bigcirc		
11	4		3/8" Lock washers	-			1
12	4		3/8" Flat washers	-			
13	4		3/8" Hex nut	30 Lb.Ft	9	00	
14	4		1/2 x 2" Hex head bolt	70 Lb.Ft		l,	"
15	8		1/2" Flat washers	-	6	(5)	(7)
16	8		1/2" Lock washers	-			<u> </u>
17	4		12mm x 120mm Hex head bolt	75 Lb.Ft	3	4	©
nstructions:					Approximate installation time: 40 min.		

- 1.- Before beginning the installation, please read all directions carefully and verify that all necessary hardware is accounted for. If any parts are missing, stop the installation and contact your distributor immediately.
- 2.- Beginning with the driver side, locate and remove the front and rear body mount bolts from underside of cab.
- 3.- Loosely attach 4097F front and 4097R rear mounting brackets to the body mounts using the 12mm bolts and 1/2" washers as shown.

NOTE: Use the 1/4" thick washers with the front mounting bolts.

- 4.- Loosely attach 4089D driver side step, to the mounting brackets using the 1/2 x 2" bolts, flat washers and lock washers.
- 5.- Locate and remove the rubber body plugs (1 front and 1 rear) from the inside face of the body rocker panel.
- 6.- Attach the 40972 support brackets to the body using the 3/8 x 1 1/4 T bolts, washers nut and to the side step using 1/4" hex bolt.

NOTE: Use 40971 for the passenger side front and rear.

- 7.- Align the side step with the vehicle and then tighten all nuts and mounting bolts.
- 8.- Repeat the above steps for the passenger side.
- 9.- Fill out the warranty card included and place it inside your vehicle.


Cleaning and care instructions:	Design:		Quali	ty:
---------------------------------	---------	--	-------	-----

Keep your product clean. Do not use abrasive cleaners or polish. We recommend only non-abrasive automotive wax such as pure carnauba to avoid scratches or rust.



INSTALLATIONS INSTRUCTIONS 4089 (B - C - PS)



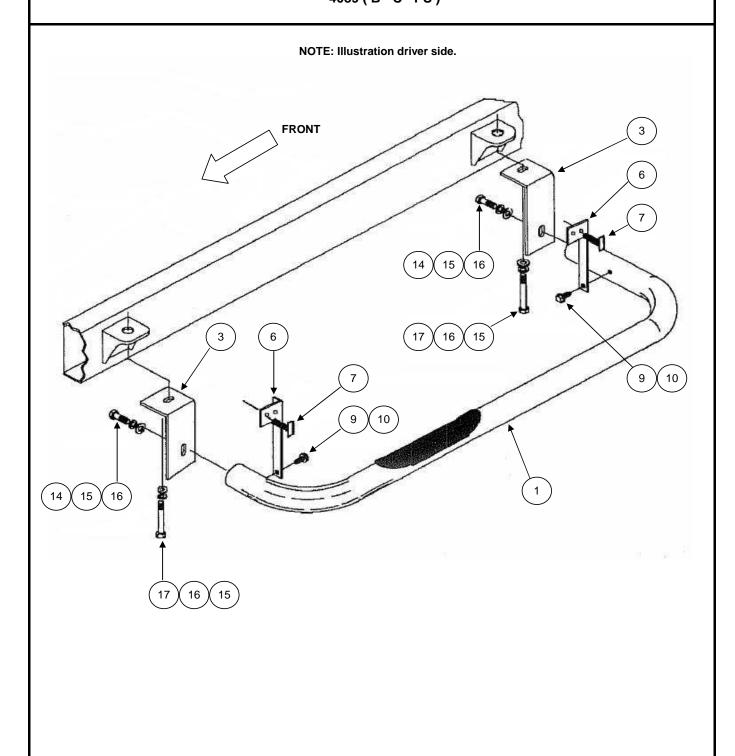

FOR TECHNICAL OR WARRANTY INFORMATION CALL: TOLL FREE (888)427-4466 FAX (714)672-0278 GO RHINO! Products® 591 W. Apollo St. Brea, CA 92821

Cleaning and care instructions:

Design:

Quality:

Keep your product clean. Do not use abrasive cleaners or polish. We recommend only non-abrasive automotive wax such as pure carnauba to avoid scratches or rust.